




Mac Mini Late 2014 Fan Replacement

Replace the fan in a Late 2014 Mac Mini.

Written By: Sam Lionheart

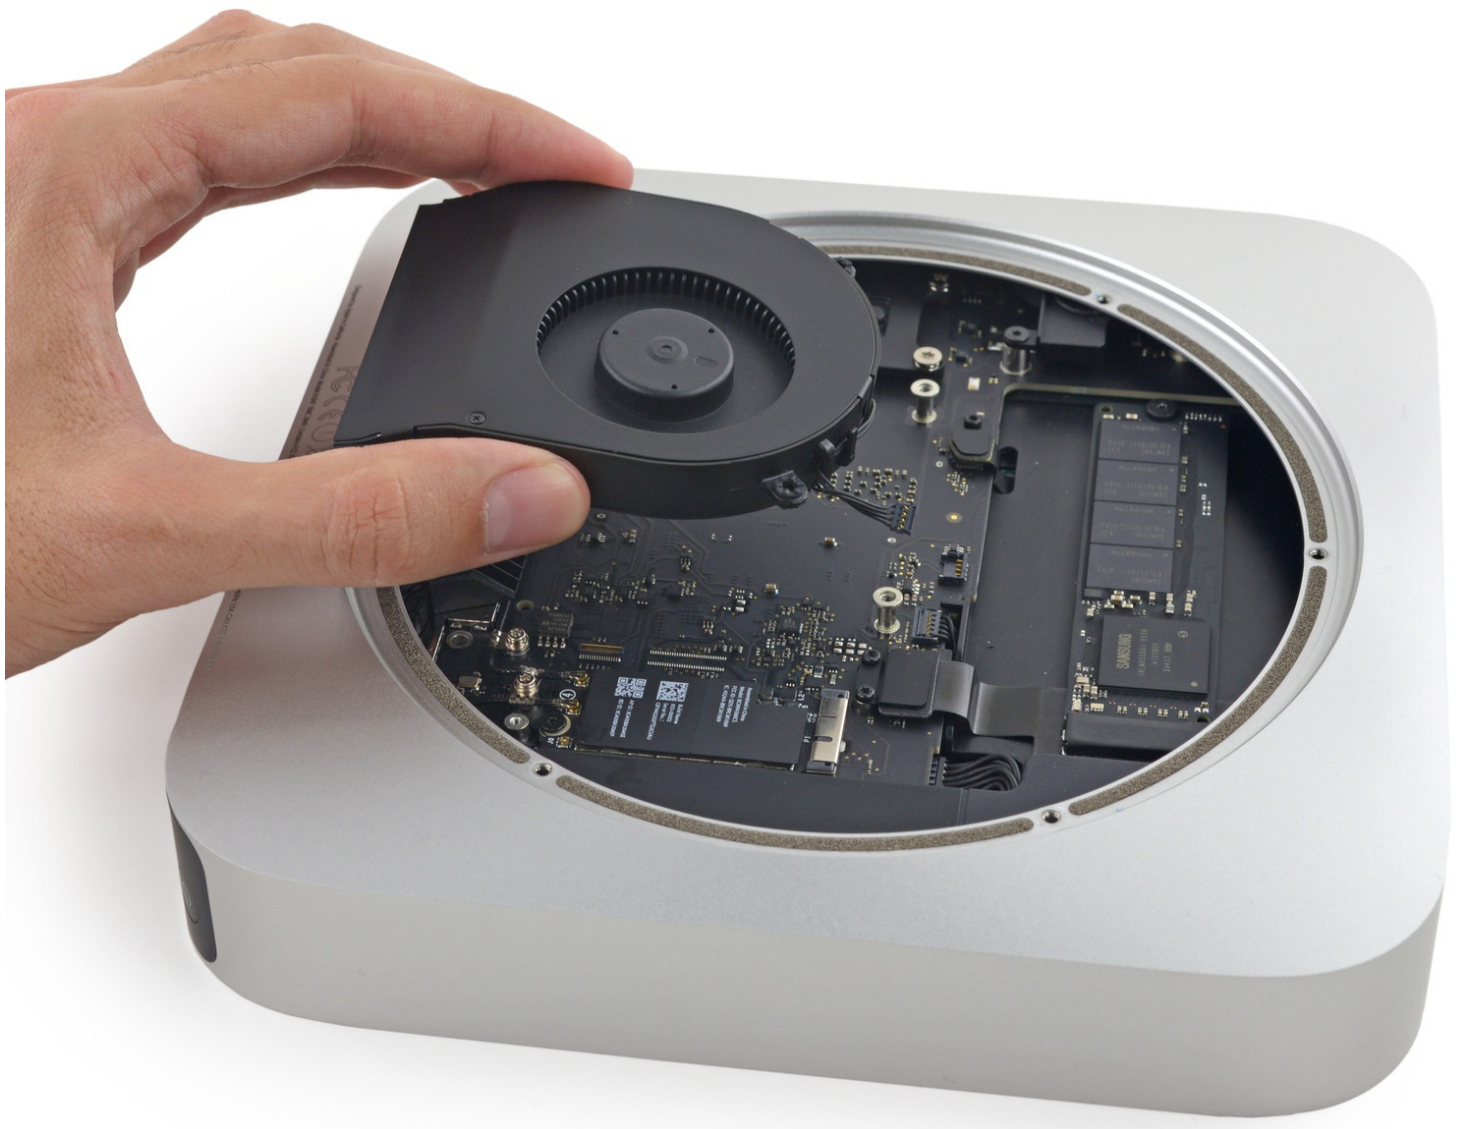

INTRODUCTION

Noisy or poorly-performing fan? Use this guide to replace the fan, or remove it for cleaning in your Mac Mini Late 2014.



TOOLS:

- [iFixit Opening Tools](#) (1)
- [Spudger](#) (1)
- [TR6 Torx Security Screwdriver](#) (1)



PARTS:

- [Intel Mac Mini \(Mid 2011/Late2012\) Fan](#) (1)

Step 1 — Bottom Cover



- The bottom cover is clipped onto three screw posts.
- Pry near, but not right on the screw posts.

Step 2



- Use the plastic opening tool to pry the bottom cover up off of the Mac Mini.

Step 3



- Lift and remove the bottom cover.

Step 4 — Antenna Plate



- Remove the following TR6 screws from the antenna plate:
 - Three 4.1 mm screws
 - Three 1.9 mm screws

Step 5



⚠ Do not completely remove the antenna plate; it is still connected to the Mac Mini by an antenna cable.

- With the I/O ports facing you, flip the antenna plate to the right to allow access to the antenna cable connector.

Step 6



- Remove the single 3.4 mm T6 screw and washer from the antenna cable.
- i** Be careful not to lose the washer when removing the screw.

Step 7



- Use the point of a spudger to lift the antenna connector straight up off its socket on the airport card.

Step 8




- Carefully pull the antenna cable out from the gap between the power supply and case.

Step 9



- Remove the antenna plate from the Mac Mini.

Step 10 — Fan Assembly

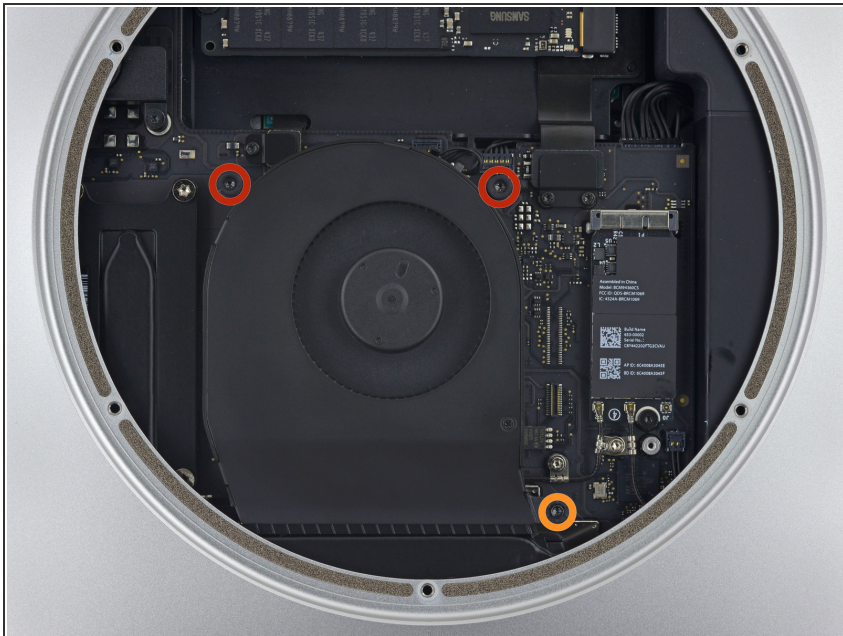

- Remove the two 12 mm T6 screws from the fan.
- Loosen the 27 mm T6 captive screw.

Step 11




i The fan connector is trapped under the edge of the fan and cannot be disconnected until the fan is moved.

⚠ Do not attempt to remove the fan entirely.

- Lift the fan straight up to free the captive screw from its hole in the logic board.
- Pull the fan away from the SSD until you can easily access the fan connector.

Step 12

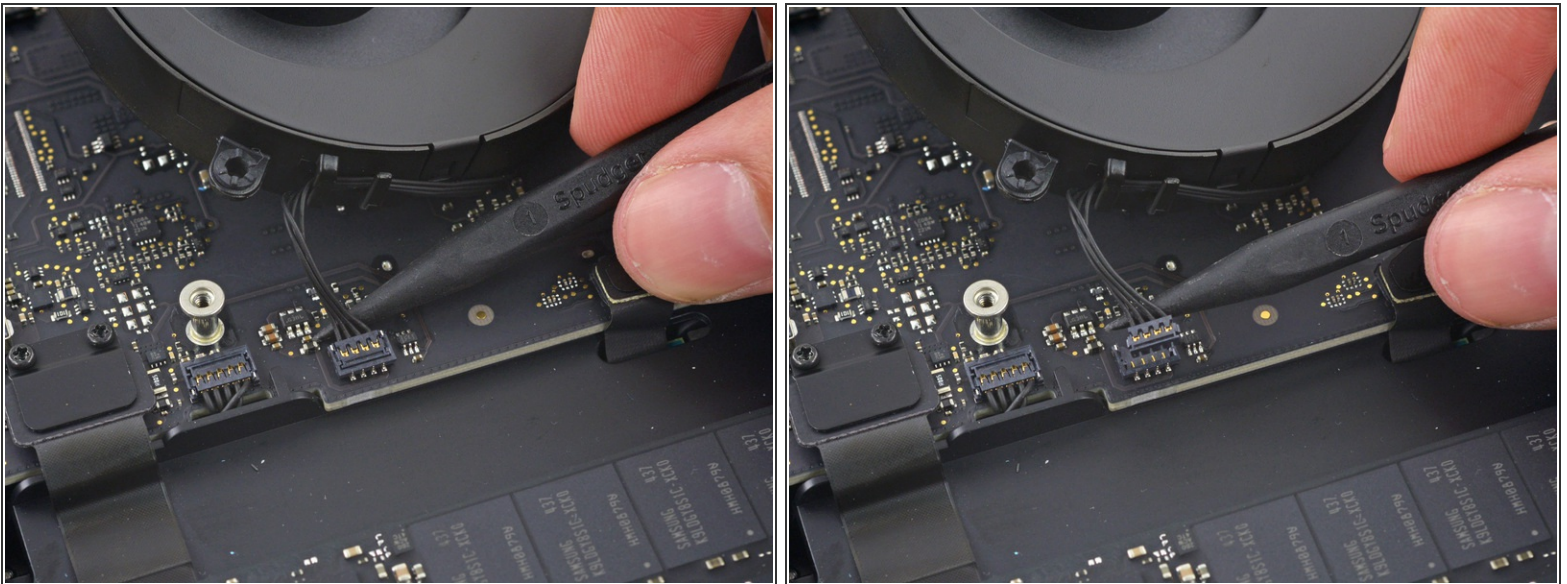

- Use the point of a spudger to lift the fan connector straight up out of its socket on the logic board.

Step 13



- Remove the fan from the Mac Mini.

Step 14 — Fan



- Remove the captive screw from the rubber grommet in the fan screw hole.

To reassemble your device, follow these instructions in reverse order.

This document was last generated on 2017-06-17 02:03:44 AM.

